

LAWN-MOWER BATTERY



Application

- ✓ Garden Tractors
- ✓ Lawn Tractors
- ✓ Riding Movers
- ✓ Rear Engine Riders
- ✓ Zero—Turn Movers
- ✓ Small Engine


Advantage

- ✓ Design for lawn mower
- ✓ Extreme startup ability and high capacity
- ✓ Absolutely maintenance-free due to modern
- ✓ Leakage and spill proof.
- ✓ Vibration proof
- ✓ Long service life


Maintenance Free (MF) Type

Model	Voltage (V)	C20 (Ah)	C10 (Ah)	CCA 0°F(-18°C)	CA 32°F(0°C)	Maximum Overall Dimension(mm)				Cell Layout	Approx Wet Weight (Kg)
						L	W	H	TH		
U1L-140	12	11.0	10.3	140	168	196	132	159	185	1	6.3
U1L-175	12	15.0	14.0	175	210	196	132	159	185	1	6.7
U1L-215	12	17.0	16.0	215	258	196	132	159	185	1	7.1
U1L-250	12	20.0	18.8	250	300	196	132	159	185	1	7.4
U1L-285	12	23.0	21.6	285	342	196	132	159	185	1	7.9
U1R-320	12	27.0	25.4	320	384	196	132	159	185	1	8.1
U1L-355	12	29.0	27.3	355	426	196	132	159	185	1	8.4
U1R-140	12	11.0	10.3	140	168	196	132	159	185	0	6.3
U1R-175	12	15.0	14.0	175	210	196	132	159	185	0	6.7
U1R-215	12	17.0	16.0	215	258	196	132	159	185	0	7.1
U1R-250	12	20.0	18.8	250	300	196	132	159	185	0	7.4
U1R-285	12	23.0	21.6	285	342	196	132	159	185	0	7.9
U1R-320	12	27.0	25.4	320	384	196	132	159	185	0	8.1
U1R-355	12	29.0	27.3	355	426	196	132	159	185	0	8.4


Terminal




Cell layout



MF Battery Structure

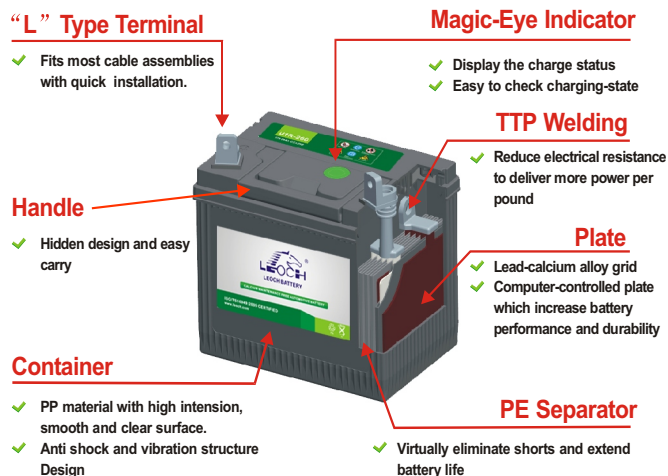

Dry Charge Battery Structure

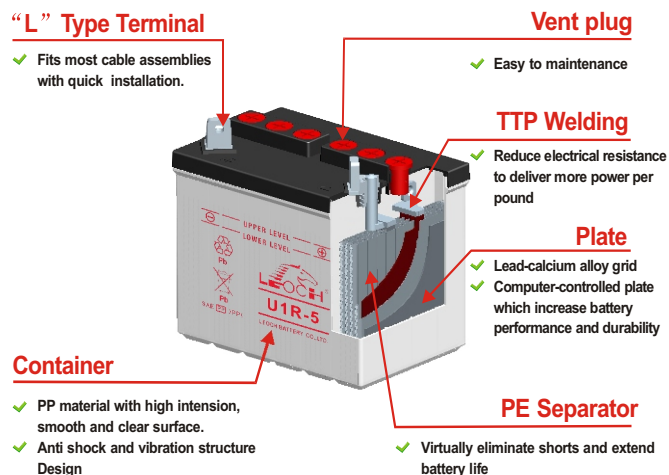

Dry Charge Type

Model	Voltage (V)	C ₂₀ (Ah)	C ₁₀ (Ah)	CCA 0°F(-18°C)	CA 32°F(0°C)	Maximum Overall Dimension(mm)				Cell Layout	Dry Weight (Kg)	Approx Wet Weight (Kg)
						L	W	H	TH			
U1-5	12	12.6	12.0	120	144	195	130	180	180	1	3.65	6.30
U1R-5	12	12.6	12.0	120	144	195	130	180	180	0	3.65	6.30
U1-6(J)	12	16.8	16.0	130	156	195	130	180	180	1	3.70	6.25
U1R-6(J)	12	16.8	16.0	130	156	195	130	180	180	0	3.70	6.25
U1-7	12	19.0	18.0	200	240	195	130	180	180	1	4.52	7.00
U1R-7	12	19.0	18.0	200	240	195	130	180	180	0	4.52	7.00
U1-9(J)	12	25.3	24.0	200	240	195	130	180	180	1	5.03	7.53
U1R-9(J)	12	25.3	24.0	200	240	195	130	180	180	0	5.03	7.53
U1-11	12	31.6	30.0	270	360	195	130	180	180	1	5.97	8.34
U1R-11	12	31.6	30.0	270	360	195	130	180	180	0	5.97	8.34

ETL SEMKO



TS16949

ISO14001

ISO9001

China Sales office:

Add: 5th Floor, Xinbaohui Bldg., Nanshan Blvd., Nanshan, Shenzhen, China.
Tel: +86-755-86036060(100 lines) E-mail: export@leoch.com

North America sales office:

Add: 19751 Descartes, Unit A, Foothill Ranch, CA 92610, USA
Tel: 949-588-5853 E-mail: sales@leoch.us

Europe Sales office:

Add: 9B Wheatstone Court, Waterwells Business Park, Gloucester, GL2-2AQ, UK
Tel: +44(0) 1452 729428 E-mail: sales.Europe@leoch.com

Singapore sales office:

Add: No. 1 Techpark Crescent Singapore 638131
Tel: +65 6863 6078 E-mail: sales.sg@leoch.com

HongKong sales office:

Add: Unit C, 33/F, TML Tower, No. 3 Hoi Shing Road, Tsuen Wan, New Territories, Hong Kong
Tel: +852 3578 6666 E-mail: sales.hk@leoch.com

WWW.LEOCH.COM

Publication No: LB-VA-U1-2015-05