




Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		66Ah
Dimension	Length	274±2mm(10.79inches)
	Width	174±2mm(6.85inches)
	Container Height	190±2mm(7.48inches)
	Total Height(with Terminal)	190±2mm(7.48inches)
Weight With Acid		Approx 16.8Kg(37.0lbs)
Acid		1.280±0.015g/cm ³ (25°C)
Standard Terminal		1
Cell layout		0
Hold-Down		B13
Case		Black-Material (PP)
Cover		Black-Material (PP)
Handle		Black-Material (PP)

Dimensions (mm)

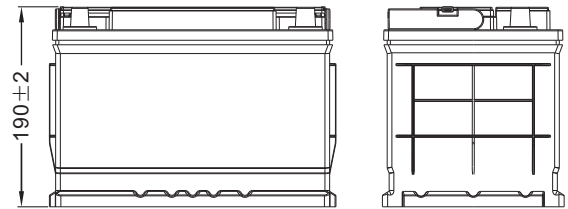

Cell Layout



Figure(0)


Electrical Specification

Rated Capacity	20 hour rate(3.3A)	66Ah
Reserve Capacity (25A@10.5V)		110min
Cold Cranking Performance Amps(CCA) @0°F(-18°C)		530A(EN)

Standard Terminal (mm)

Terminal Type	D	
	Positive	Negative
1	19.5 ⁰ _{-0.3}	17.9 ⁰ _{-0.3}

Discharge Characteristics

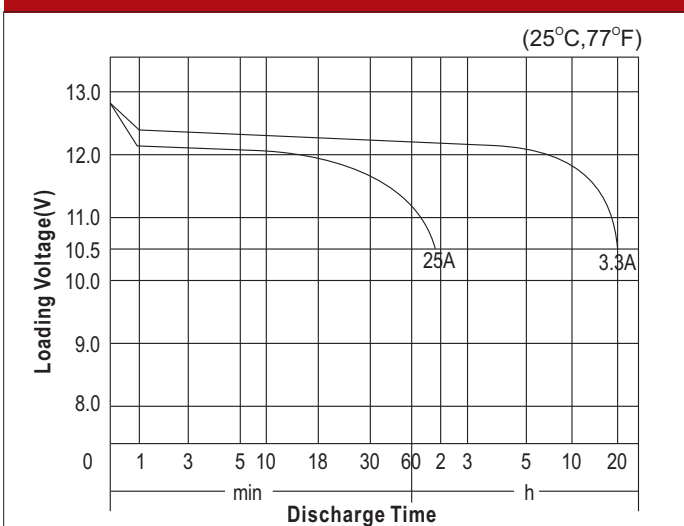

Discharge Characteristics

