

Physical Specification (mm)

| | | |
|------------------------|-----------------------------|-------------------------------------|
| Nominal Voltage | | 12V |
| Nominal Capacity(20HR) | | 36Ah |
| Dimension | Length | 195±2mm(7.68inches) |
| | Width | 126±2mm(4.96inches) |
| | Container Height | 201±2mm(7.91inches) |
| | Total Height(with Terminal) | 221±2mm(8.70inches) |
| Weight With Acid | | Approx 9.7Kg(21.4lbs) |
| Acid | | 1.280±0.015g/cm ³ (25°C) |
| Standard Terminal | | 3 |
| Cell layout | | 1 |
| Hold-Down | | B0 |
| Case | | Black-Material (PP) |
| Cover | | Black-Material (PP) |
| Handle | | Black-Material (PP) |


Electrical Specification

| | | |
|---|--------------------|-----------|
| Rated Capacity | 20 hour rate(1.8A) | 36Ah |
| Reserve Capacity (RC)25A@10.5V | | 54min |
| Cold Cranking Performance Amps(CCA) @0°F(-18°C) | | 335A(JIS) |


Standard Terminal (mm)

| Terminal Type | D | |
|---------------|-----------------------------------|-----------------------------------|
| | Positive | Negative |
| 3 | 14.7 ⁰ _{-0.3} | 13.0 ⁰ _{-0.3} |

Discharge Characteristics

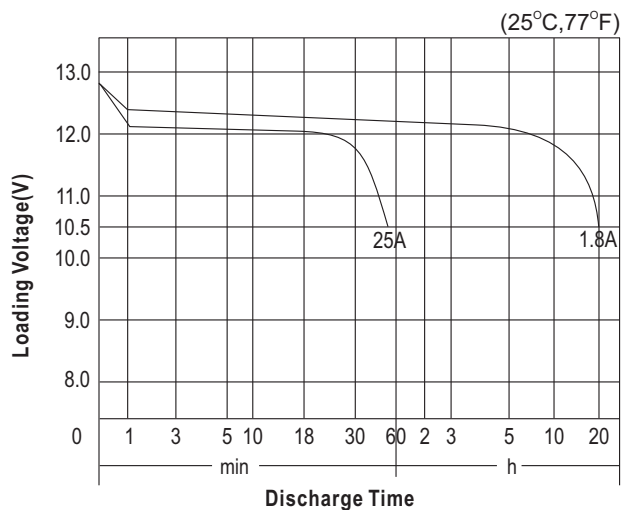

Discharge Characteristics

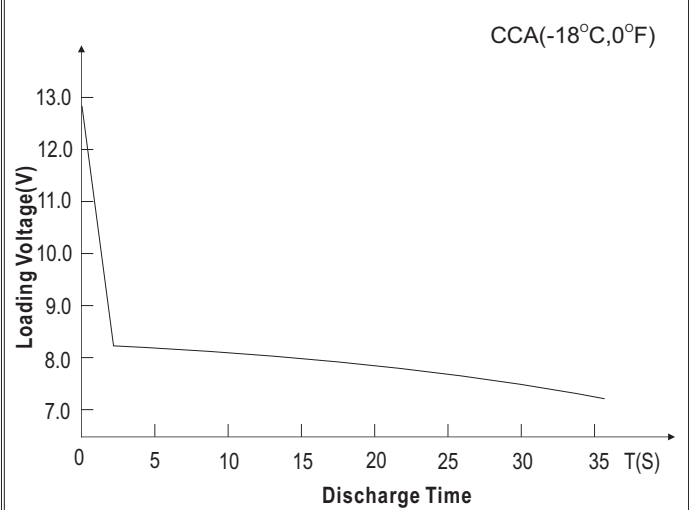

Dimensions (mm)

