


Physical Specification (mm)

| | | |
|------------------------|-----------------------------|-------------------------------------|
| Nominal Voltage | | 12V |
| Nominal Capacity(20HR) | | 60Ah |
| Dimension | Length | 268±2mm(10.55inches) |
| | Width | 172±2mm(6.77inches) |
| | Container Height | 182±2mm(7.17inches) |
| | Total Height(with Terminal) | 202±2mm(7.95inches) |
| Weight With Acid | | Approx 16.0Kg(35.3lbs) |
| Acid | | 1.280±0.015g/cm ³ (25°C) |
| Standard Terminal | | 1 |
| Cell layout | | 1 |
| Hold-Down | | B1 |
| Case | | Black-Material (PP) |
| Cover | | Black-Material (PP) |
| Handle | | Black-Material (Nylon) |



Dimensions (mm)

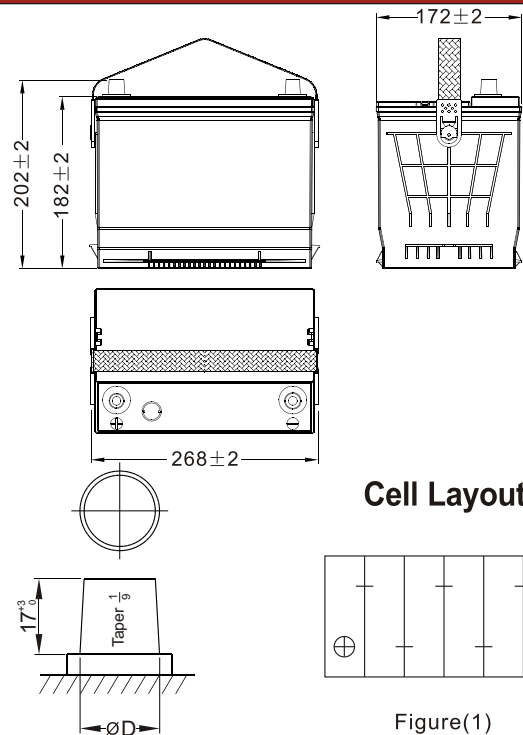


Electrical Specification

| | | |
|---|--------------------|-------|
| Rated Capacity | 20 hour rate(3.0A) | 60Ah |
| Reserve Capacity (CA)25A@10.5V | | 98min |
| Cold Cranking Performance Amps(CCA) @0°F(-18°C) | | 550A |

Standard Terminal (mm)

| Terminal Type | D | |
|---------------|-----------------------------------|-----------------------------------|
| | Positive | Negative |
| 1 | 19.5 ⁰ _{-0.3} | 17.9 ⁰ _{-0.3} |

Discharge Characteristics

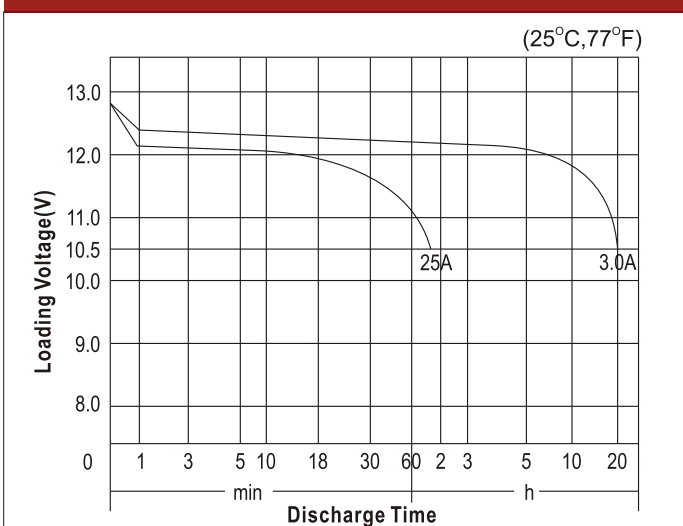

Discharge Characteristics

